


CUSTOMER DATA: _____
 SERIES AND MODEL: _____ INSTALLER DATA: _____
 FITTINGS COLOR: _____
 GLASS COLOR: _____


MOUNTING PROFILE:

| | | |
|---------------------------------|--------------------------|--------------------------|
| | X | Y |
| COMPLIES WITH SERIES AND MODELS | <input type="checkbox"/> | <input type="checkbox"/> |
| OTHER: | <input type="checkbox"/> | <input type="checkbox"/> |
| OTHER: | <input type="checkbox"/> | <input type="checkbox"/> |

MEASUREMENT METHODS: ENTRANCE: SIDE „X” SIDE „Y”

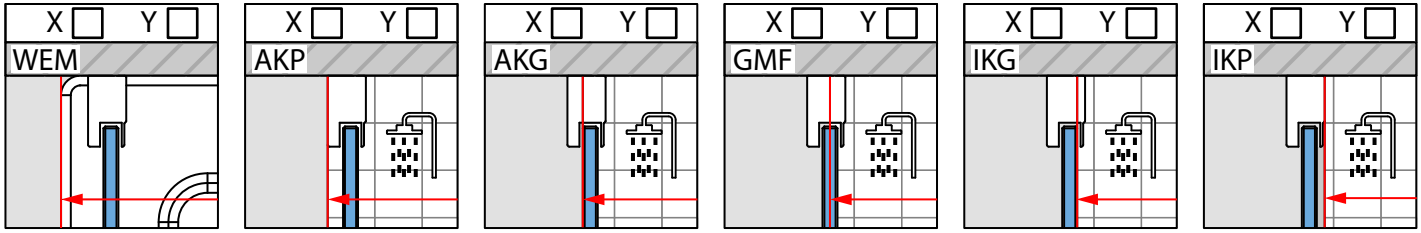


MAIN DRAWING

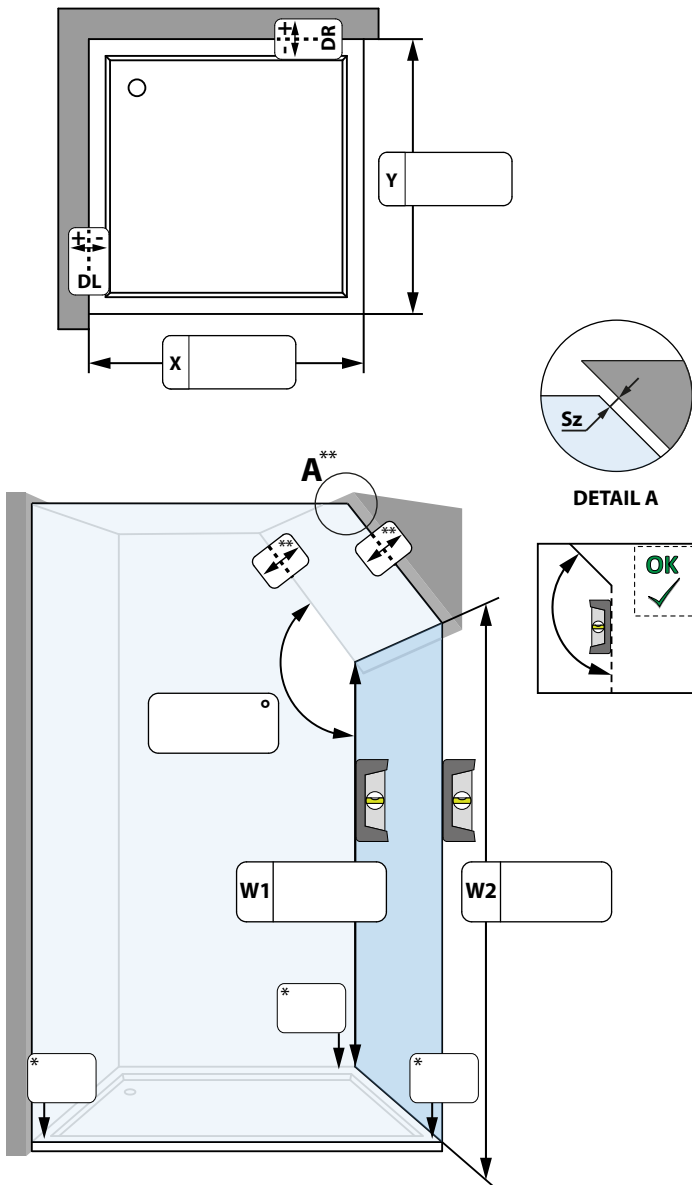


CONSTRUCTION HEIGHT AT "0" POINT:

STANDARD OTHER:

MEASURE AND GIVE DEVIATIONS (A BLANK FIELD MEANS NO DEVIATION)

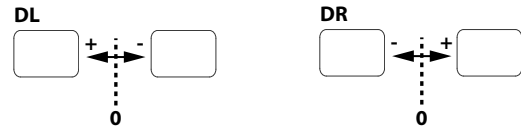

CHOOSE THE VARIANT OF THE LAYOUT OF THE BUILDING WALLS FOR X AND Y:

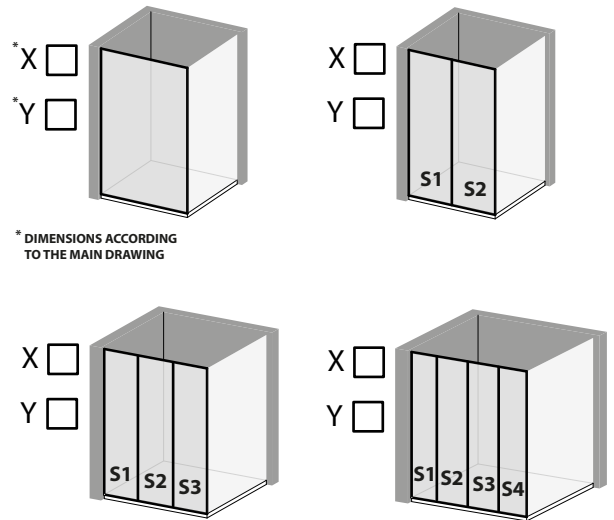

* DIMENSIONS ACCORDING TO THE MAIN DRAWING

GIVE DIMENSIONS AND METHOD OF INTERPRETATION:

| | X | Y |
|----|---|---|
| S1 | | |
| S2 | | |
| S3 | | |
| S4 | | |

* INDICATE "0" POINT(S) AND SPECIFY DEVIATION(S) AS A NEGATIVE VALUE POINT(S) "0" IS/ARE THE HIGHEST POINT(S) ON THE FLOOR / SHOWER TRAY / L-SHAPE WALL

** CHECK THE FLATNESS OF THE CEILING AND DESCRIBE ANY CURVES. STANDARD IS 4 MM FOR FIXED PARTS, 10 MM FOR SINGLE DOORS, 15 MM FOR BIFOLD DOORS, CONSIDER INCREASING THE GAP.

 ATTENTION, RADAWAY, FOR TECHNOLOGICAL REASONS, RESERVES THE POSSIBILITY OF MAKING CONSTRUCTION CHANGES.

REMARKS: _____